



DAVEY
Firefighter®

RUGGED, ECONOMICAL TWIN STAGE ENGINE DRIVEN WATER TRANSFER PUMP

FEATURES & BENEFITS

- **Driven by either a Honda GX160 or a Honda GX200 engine** which is specially designed for domestic or infrequent use. The GX200 engine is also available in electric start.
- **Patented clamped impeller design** to enable longer impeller life, improved performance and easier disassembly in the case of blockage.
- **Twin impeller design** provides extra strong pressure for longer and higher pumping applications.
- **Thrust balanced impeller design** to extend engine life.
- **Pump casing, diffusers and impellers manufactured from quality corrosion resistant marine grade aluminium** for long life.
- **Polyester coated pump casing, exterior and interior**, for added corrosion resistance.
- **Patented floating impeller neckrings front and back.** The front neckring helps improve pumping efficiency, the back neckring helps extend seal life and dramatically reduce engine wear.

Model Number:
5255H*, 5265H*, 5265HE,
5265HEV, 5265HV

WARRANTY
Up to 5 YEARS - Wet end*
3 YEARS - Honda GX motors

APPLICATIONS

Ideal for firefighting, tanker to tanker water transfer, high head general water transfer, sheep jetting, irrigation and boom spraying.

- **Self priming from 6m** for more versatile installation options.
- **Large priming and drain port with bayonet fit plugs.** Plugs have safety retention system, plus are available with 1/4" tapping to accept pressure gauges or drain cocks.
- **Low-oil protection on all models - engines won't start or run if oil level is inadequate**, thus protecting your engine.
- **Electric start models have electric starter (battery and leads required) and recoil starter fitted**, ensures a choice of starting methods, even if the battery is flat or removed.
- **"HV" models come with Viton® seal, orings, gaskets, caps etc. fitted** for improved chemical resistance. (Please seek specialist advice from chemical supplier if pumping chemicals. Use of aggressive chemicals may void warranty.)
- **All engines conform to the tough environmental requirements of the USA EPA, CARB and the proposed Australian Emissions Standards**, to help look after the environment.

*Only 5255H & 5265H are fitted with roll frames


Engine Driven Pumps

DAVEY

OPERATING LIMITS	
Flow capacities to	400 L/min
Maximum total head	106m
Maximum suction lift	7m
Maximum water temperature	50°C
Minimum water temperature	1°C
Maximum casing pressure	1,600kPa
Minimum suction pipe size	1½"
Suction pipe strainer	Required
Inlet size*	1½"

*Dependant upon model chosen

ENGINE SPECIFICATIONS			
Twin Stage Pump Model	5255H	5265H 5265HV	5265HE
Engine brand	Honda		
Engine model	GX160	GX200	GX200E
Engine type	Overhead valve		
Displacement (cc)	163	196	196
Oil capacity (litres)	0.6	0.6	0.6
Compression ratio	8.5 : 1		
Air filter type	Twin stage – foam prefilter with paper element final filter		
Spark arrestor	YES	YES	YES
dBA @ 4m @ 3600 rpm @ full head	85	86	86

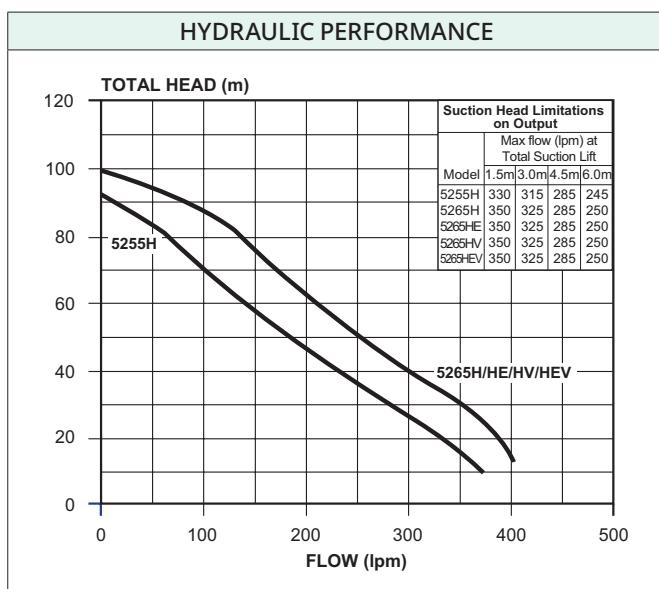


*NOTE: Standard 3 year warranty from point of purchase, and up to 5 years total warranty, when serviced between the start of Year 2 and the end of Year 3 by a registered Davey Service Agent with proof of service.

MATERIALS OF CONSTRUCTION	
PART	MATERIAL
Suction cover	Marine grade aluminium (AS605)
Diffuser	Marine grade aluminium (AS605)
Impeller	Marine grade aluminium (AS605)
Casing / yoke	Marine grade aluminium (AS605)
Mechanical seal	Carbon / Ceramic
Discharge / handle	Marine grade aluminium (AS605)
Casing bolts	Zinc plated steel
Yoke bolts	Stainless Steel
Flap valve / seal ring	Zinc body, hytrel seal
Neck ring, priming and drain plug	Glass filled nylon
Casing, priming and drain plug o-ring	Nitrile rubber
Discharge gasket	Hytrel
Paint finish	Baked polyester powder coat

DIMENSIONS (mm)								
Model	A	B	C	D	E	Inlet BSP	Outlet BSP	Net Weight (kg)
5255H*	605	450	410	195	322	1½" M	2x1" M 2x1½" M	28
5265H*	605	450	410	195	322	1½" M	2x1" M 2x1½" M	29
5265HV	580	389	402	170	297	1½" M	2x1" M 2x1½" M	28
5265HE	580	389	402	170	297	1½" M	2x1" M 2x1½" M	29.5
5265HEV	580	389	402	170	297	1½" M	2x1" M 2x1½" M	29.5

*Dimensions and weight includes supplied frame as pictured

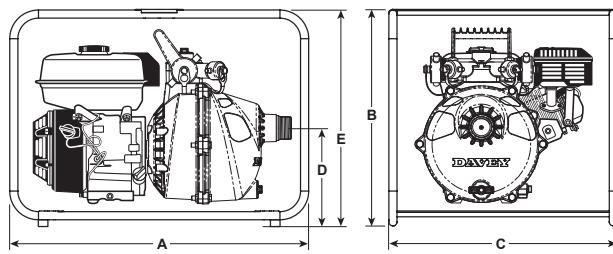

INSTALLATION AND PRIMING	
<ul style="list-style-type: none"> Fit strainer to bottom of suction pipe; a foot valve is not required. To prime, fill pump body with water then allow pump to run until drawing water. 	



daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2025.

DAVEY