
Quick Twist Undersink Water Filter System





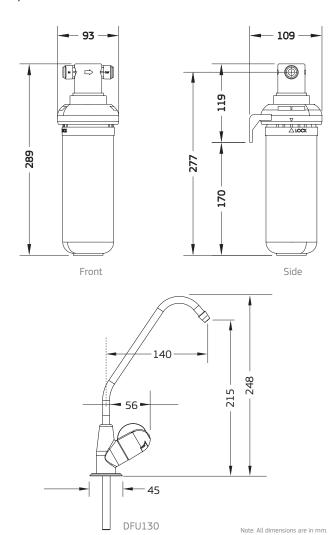

Specifications

Ordering Code	Temp °C	Pressure** (kPa)	Flow (Lpm)	Micron Rating*	Connection	Cartridge Size	Capacity*** (L)
Z12	0-38	200-500	5.5	0.1	Hose: 3/8" Quick Connect Tee: 1/2" BSP [15mm]	10"	30,000
DFU130	0-52	200-500	7	-	1/4" tube (7/16" BSP)	-	-

Notes: Replacement cartridge code: Z1-R. Required tap hole: 12.5mm.

Designed to filter mains and town water supply. Can be mounted horizontally or vertically. Protect from freezing.

RA Z FILTRATION	TECHNOLOGI
STAGE 1	Removes' particles Clarifies the water Removes' sediment, rust, sand, silt and algae
STAGE 2	Chlorine and chloramine reduction Eliminates' bad taste and odours Chemical presticides and sulphur reduction
STAGE 3	Ultra Z Filtration membrane finely filters to 0.1 micron* Provides protection against cysts and bacteria such as E. coli Removes the finest particles

Warranty

Use only genuine Puretec replacement cartridge. 10 year warranty is 1 year parts and labour, 9 years parts only.



Warning: Please visit www.puretec.com.au/instructions to observe essential manufacturer's instructions before use. Note: No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change. This document and all its contents are copyright protected. All rights are reserved, particularly attention, translation and reproduction using electronic systems. This spec sheet has been designed to help make product selection easy. However due to the complex nature of water chemistry, we strongly encourage confirming any product selection with one of our tends to perform a water analysis test to confirm contaminants in water. Caution: Do not use with mirrorisologically unstant water or water of unknown quality without adequate disinfection before or after the system. Our Water Filtration Specialists can provide you with advice to suit your needs. "Where line pressure exceeds \$20kPa, an approved pressure limiting device must be installed to comply, with advice to suit your needs. (Ref. AS \$3001.2021, Clause 3.3.4). Maximum flow depends on cartridges, vessel, pressure, impurities etc. "Micron rating is nominal. ""Capacity is based on inlet chlorine @2ppm±10%. "The term 'removal' and 'eliminate indicates significant reduction, not necessarily 100% removal.